


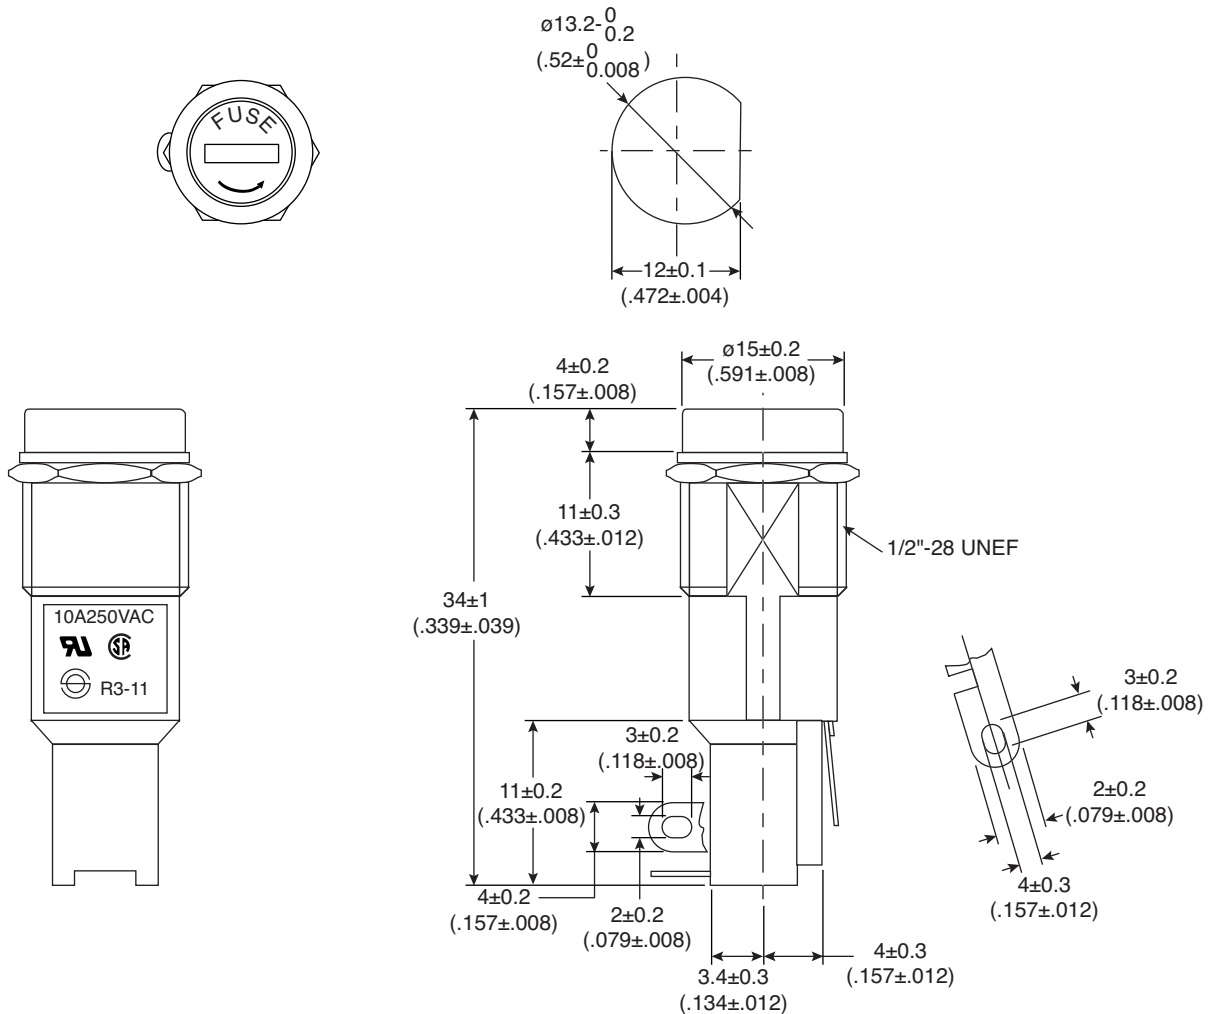

Dimensions: In.

SPECIFICATIONS	
Rating:	10A 250VAC
Insulation Resistance:	500VDC 100M Ω Min.
Dielectric Strength:	1500VAC 1 minute
Fuse Size:	$\phi 5 \times 20$ L mm
Body:	PF
Cap:	PBT
Contacts:	Copper alloy tin plated