


# SHINDENGEN

## TSS KP Series

SMT

**KP15R25**

### OUTLINE DIMENSIONS

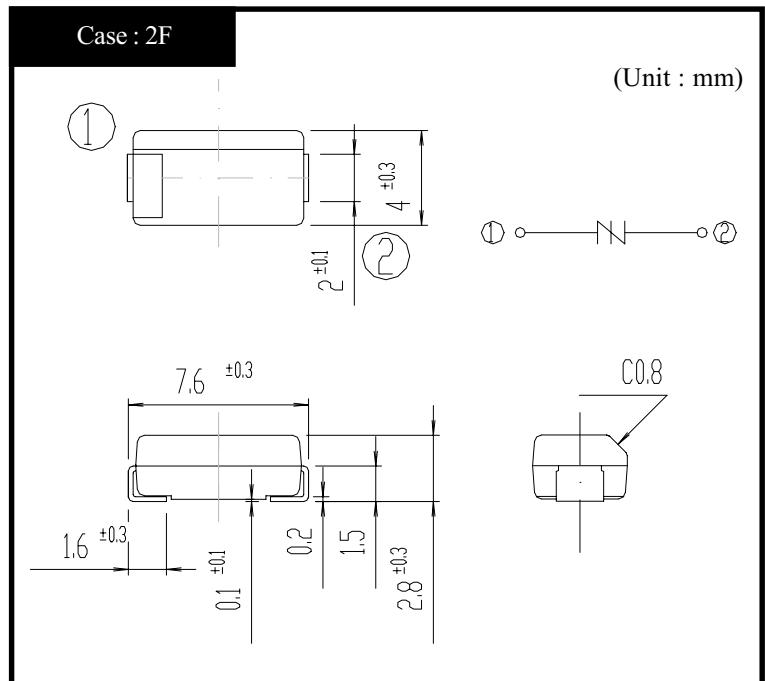

### RATINGS


#### ● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-40~125	°C
Junction Temperature	T <sub>j</sub>		125	°C
Maximum Off-State Voltage	V <sub>DRM</sub>		190	V
Surge On-State Current	I <sub>TSM</sub>	10/1000 $\mu$ s, Non-repetitive	150	A
		10/200 $\mu$ s, Non-repetitive	200	
		8/20 $\mu$ s, Non-repetitive	300	


#### ● Electrical Characteristics (T<sub>j</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Breakover Voltage	V <sub>BO</sub>	Pulse measurement (Peak hold)	Min 220	V
Off-State Current	I <sub>DRM</sub>	V <sub>D</sub> = V <sub>DRM</sub>	Max 10	$\mu$ A
Holding Current	I <sub>H</sub>	Pulse measurement	Min 100	mA
On-State Voltage	V <sub>T</sub>	I <sub>T</sub> = 2A	TYP 1.35	V
Junction Capacitance	C <sub>j</sub>	f = 1kHz OSC = 1V, V <sub>D</sub> = 50V	Max 150	pF
Clamping Voltage	V <sub>CL</sub>	dv/dt = 100V/ $\mu$ s	Max 290	V

## KP15R25 On-State Voltage - On-State Current

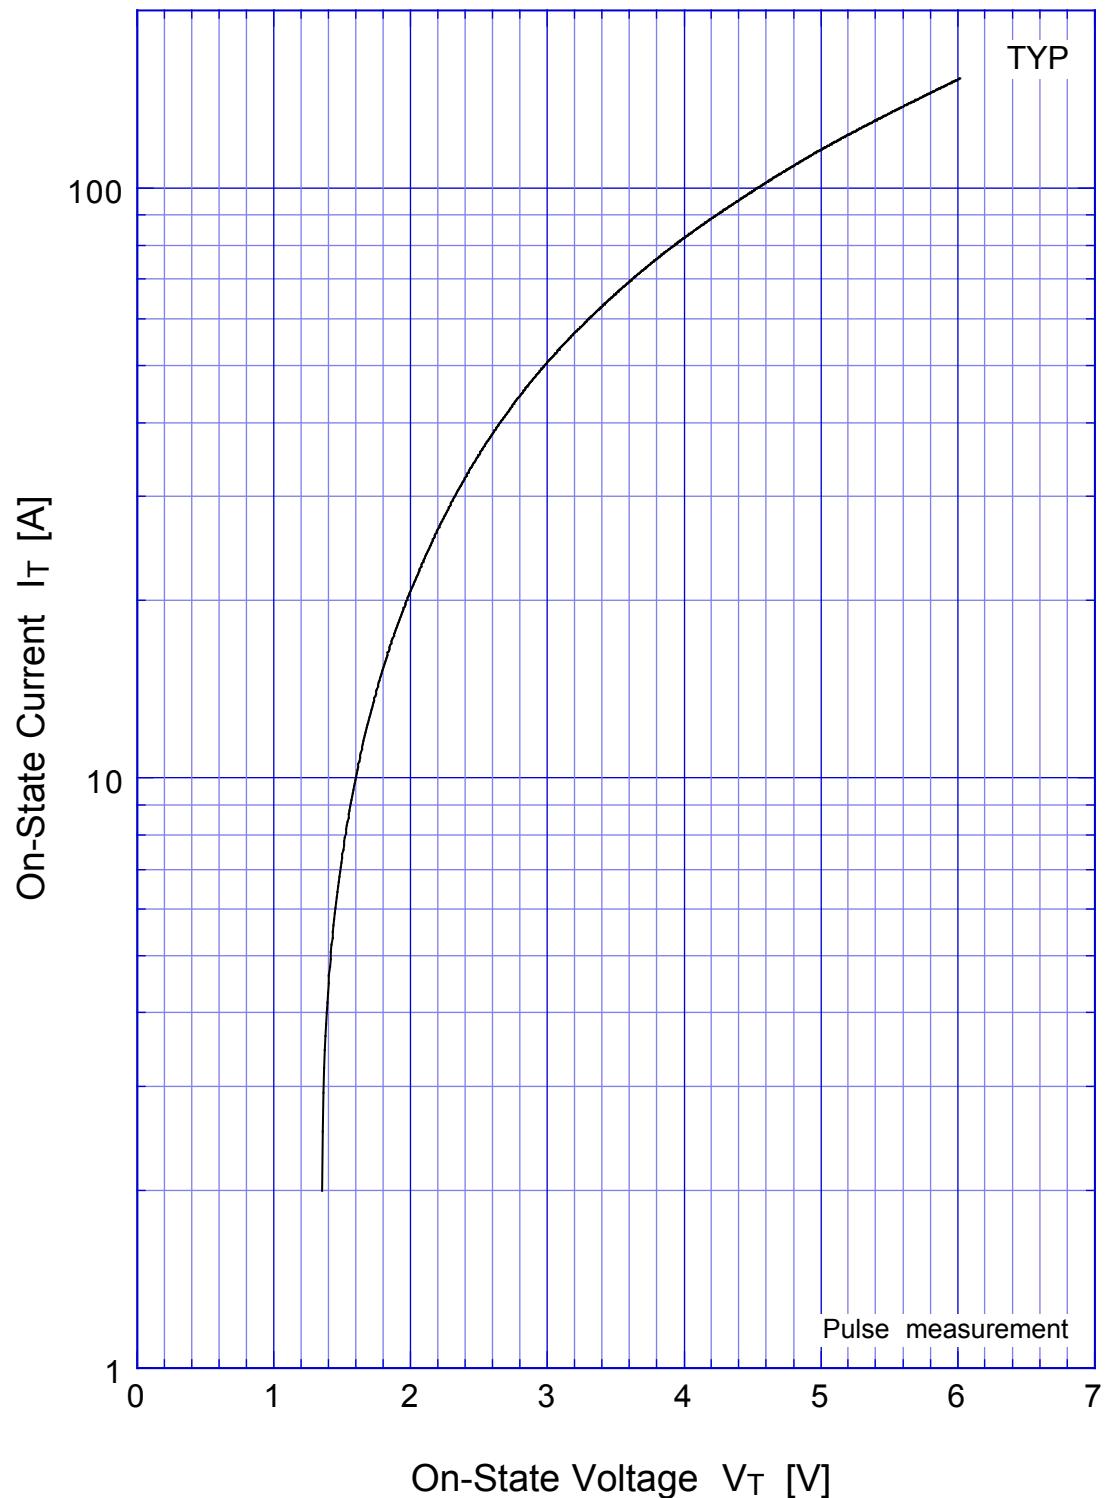


## KP15R25 Breakover Voltage - Junction Temperature

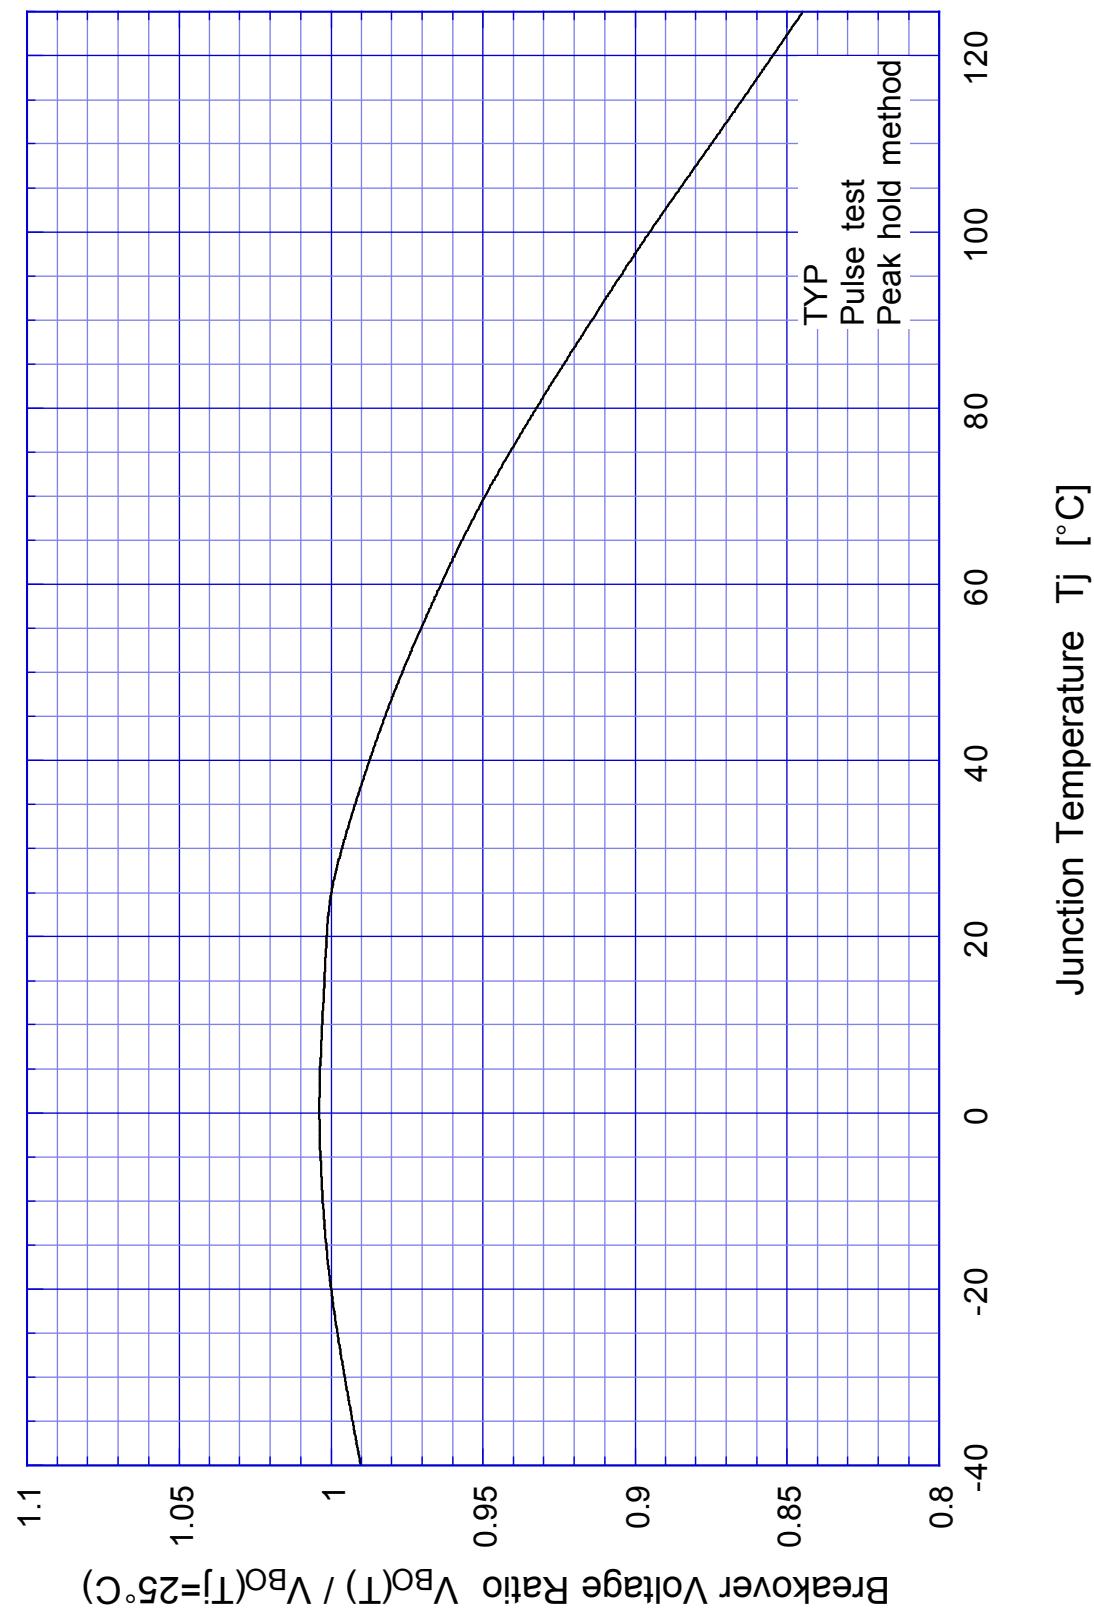


## KP15R25 Holding Current - Junction Temperature

---

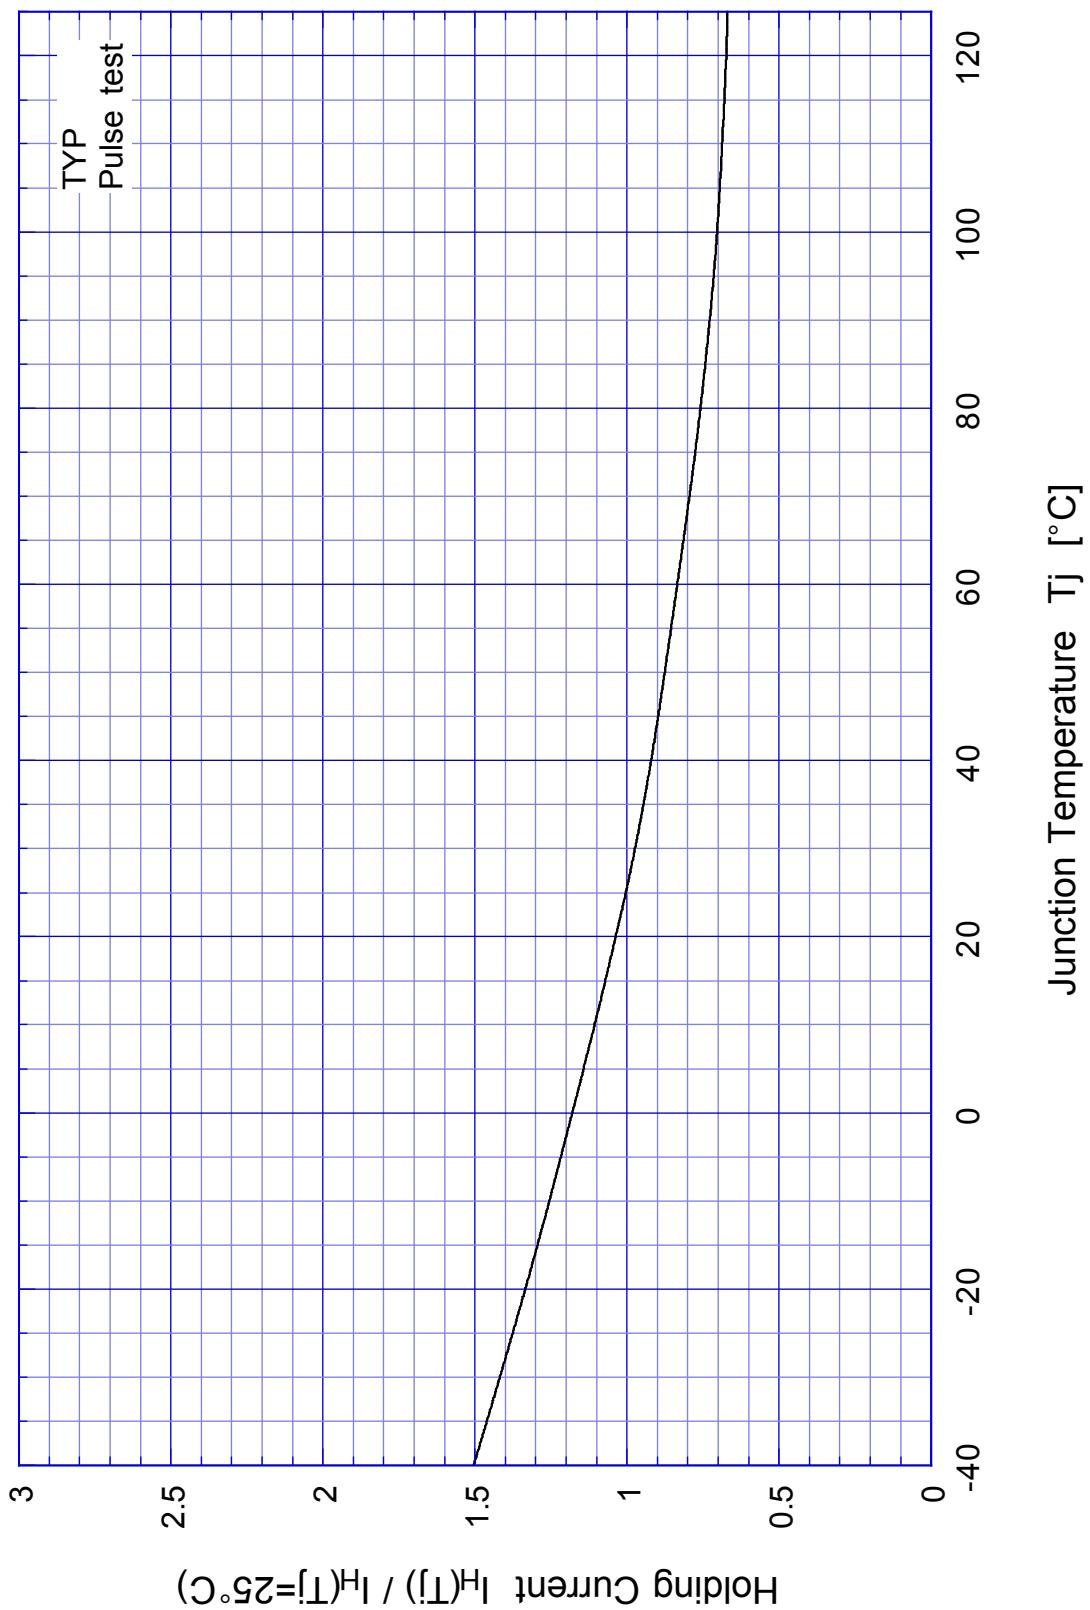

KP15R25 Junction Capacitance

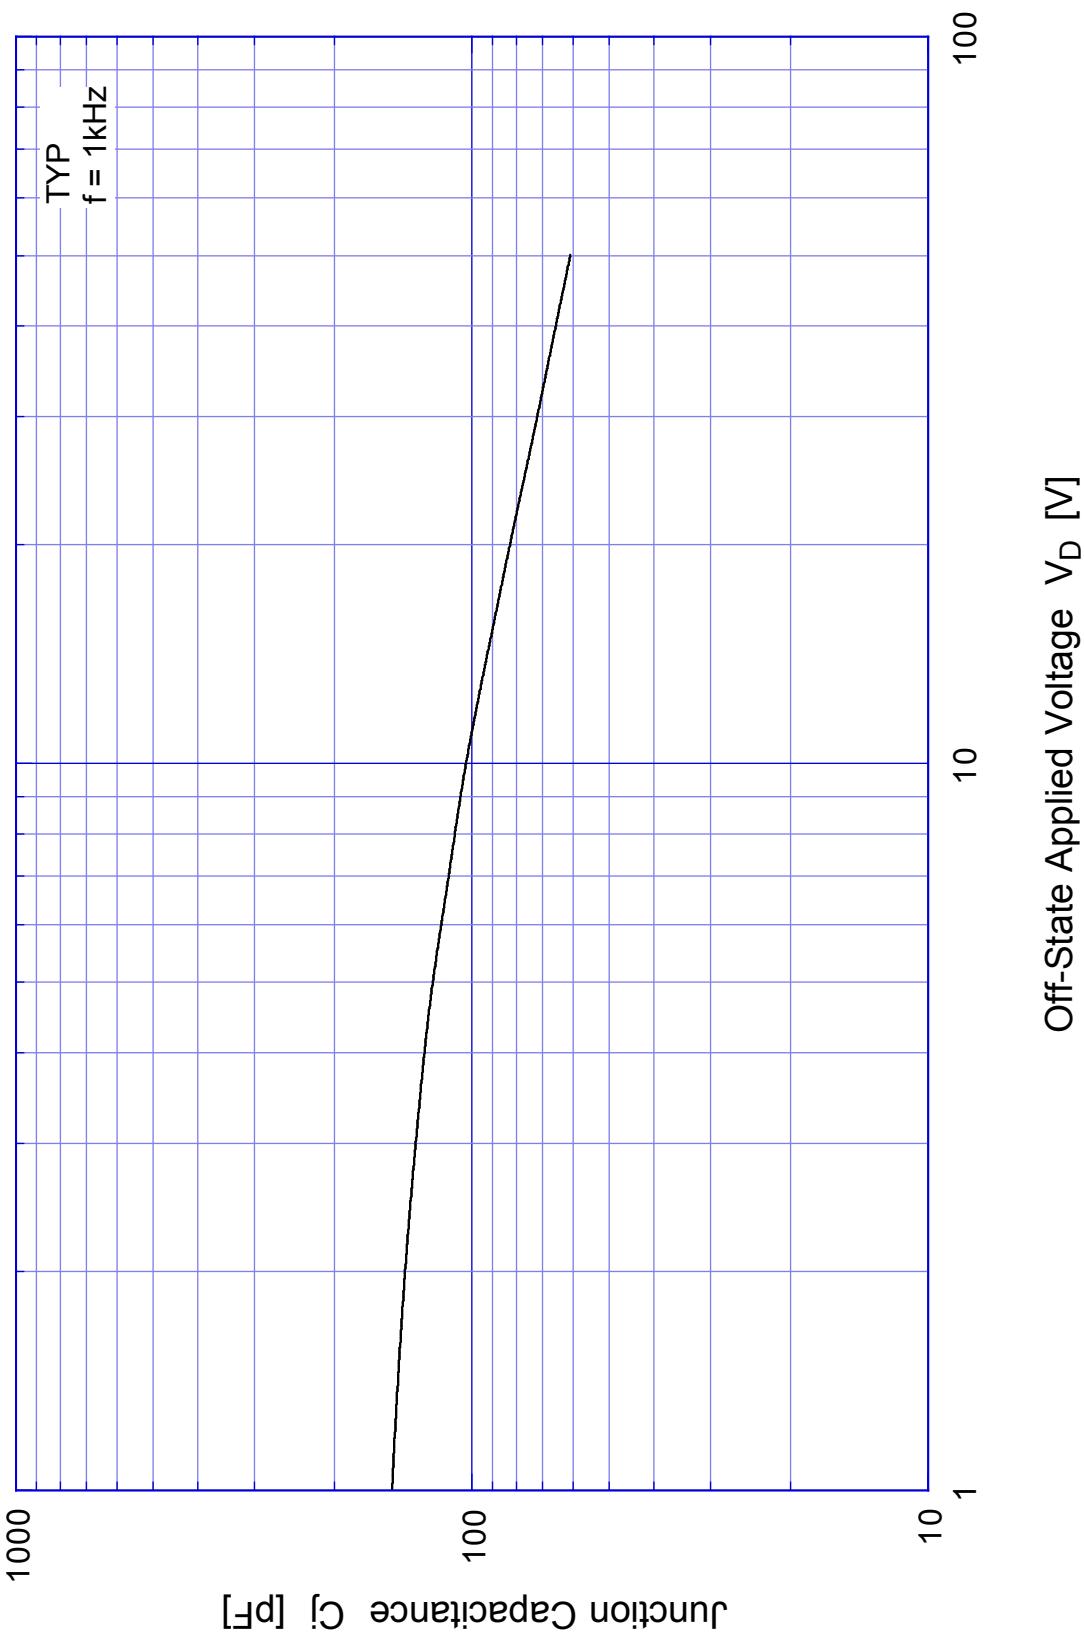

KP15R25 Junction Capacitance

